



◀ **Electric Radiator**

KADO 1500↑ x 40↔ EX,
colour: RAL 9005 Matt
radiator code: WLKAD150004 K905EX

Valves and accessories

ONE R36

KADO



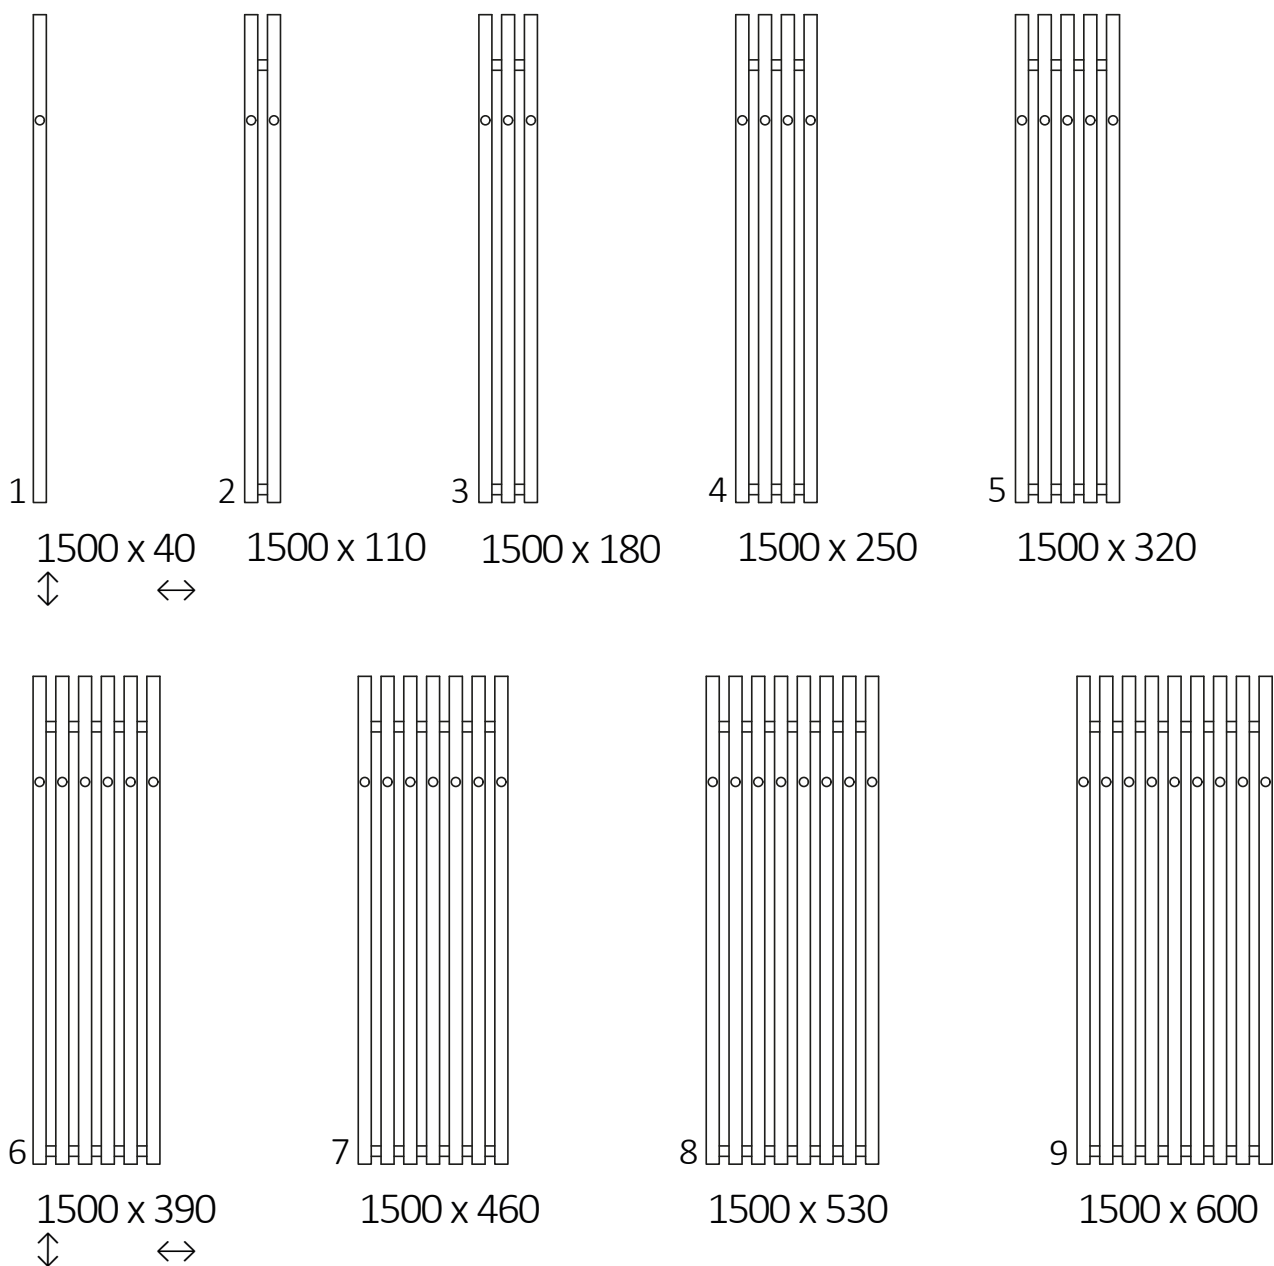
**TERMA COLOR PALETTE
AND CHROME***

*in the electric version, the size
1500x40 is not available in chrome





AVAILABLE SIZES



CENTRAL HEATING / DUAL FUEL

Connections

B ↔ 40: B ↔ 110 ÷ 600: B ↔ 180, 320, 460, 600:



Height A ↑ [mm]	Width B ↔ [mm]	Heating power – powder paint			Heating power – plated finishes			Product code ... Configuration p. 14
		75/65/20°C [W]	55/45/20°C [W]	 [W]	75/65/20°C [W]	55/45/20°C [W]	 [W]	
1500	40	109	57	120	70	37	–	WGKAD150004...
1500	110	218	113	200	141	74	120	WGKAD150011...
1500	180	326	170	300	211	111	200	WGKAD150018...
1500	250	435	226	400	282	148	300	WGKAD150025...
1500	320	544	283	600	352	185	400	WGKAD150032...
1500	390	653	340	600	422	222	400	WGKAD150039...
1500	460	762	397	800	493	259	600	WGKAD150046...
1500	530	870	453	800	563	296	600	WGKAD150053...
1500	600	979	510	1000	634	333	600	WGKAD150060...

DIMENSIONS AND TECHNICAL INFORMATION

Working pressure: 1000 kPa

Maximum operating temperature: 95°C

Height A ↑ [mm]	Width B ↔ [mm]	Spacing connection C2 [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity (powder paint) [dm³]	Weight (powder paint) [kg]	Capacity (plated finishes) [dm³]	Weight (plated finishes) [kg]
1500	40	–	–	1145	120	1,67	2,52	1,67	2,44
1500	110	70	70	1145	120	3,38	4,90	3,38	4,74
1500	180	140	140	1145	120	5,09	7,28	5,09	7,04
1500	250	210	210	1145	120	6,80	9,67	6,80	9,34
1500	320	280	280	1145	120	8,50	12,05	8,50	11,64
1500	390	350	350	1145	120	10,21	14,43	10,21	13,94
1500	460	420	420	1145	120	11,92	16,81	11,92	16,24
1500	530	490	490	1145	120	13,63	19,19	13,63	18,54
1500	600	560	560	1145	120	15,34	21,57	15,34	20,84

ELECTRIC RADIATOR

Connections

B ↔ 40: B ↔ 110 ÷ 600:



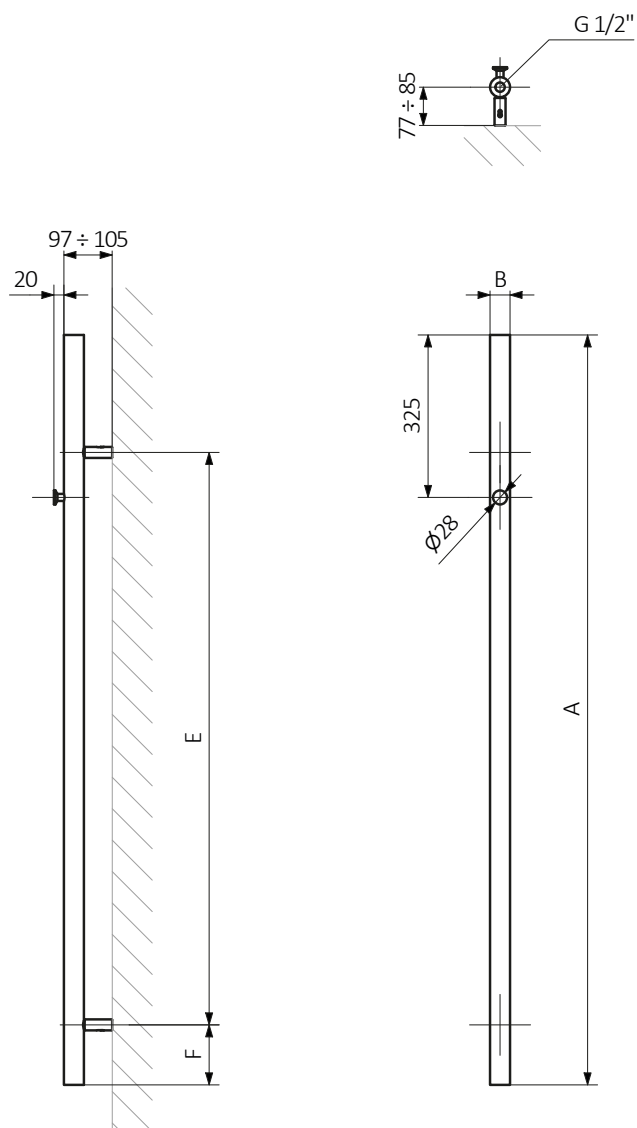
Height A ↕ [mm]	Width B ↔ [mm]	Heating power – powder paint [W]	Heating power – plated finishes [W]	Product code ... Configuration p. 15
1500	40	120	–	WLKAD150004...
1500	110	200	120	WLKAD150011...
1500	180	300	200	WLKAD150018...
1500	250	400	300	WLKAD150025...
1500	320	600	400	WLKAD150032...
1500	390	600	400	WLKAD150039...
1500	460	800	600	WLKAD150046...
1500	530	800	600	WLKAD150053...
1500	600	1000	600	WLKAD150060...

DIMENSIONS AND TECHNICAL INFORMATION


Height A ↕ [mm]	Width B ↔ [mm]	Spacing horizontal fasteners D [mm]	Spacing vertical fasteners E [mm]	Bottom fasteners position F [mm]	Capacity (powder paint)  [dm³]	Weight (powder paint)  [kg]	Capacity (plated finishes)  [dm³]	Weight (plated finishes)  [kg]
1500	40	–	1145	120	1,67	4,41	–	–
1500	110	70	1145	120	3,38	7,64	3,38	8,42
1500	180	140	1145	120	5,09	11,40	5,09	12,37
1500	250	210	1145	120	6,80	15,18	6,80	16,32
1500	320	280	1145	120	8,50	18,94	8,50	20,26
1500	390	350	1145	120	10,21	22,70	10,21	24,20
1500	460	420	1145	120	11,92	26,47	11,92	28,16
1500	530	490	1145	120	13,63	30,23	13,63	32,10
1500	600	560	1145	120	15,34	34,00	15,34	36,05

TECHNICAL DRAWING

O1

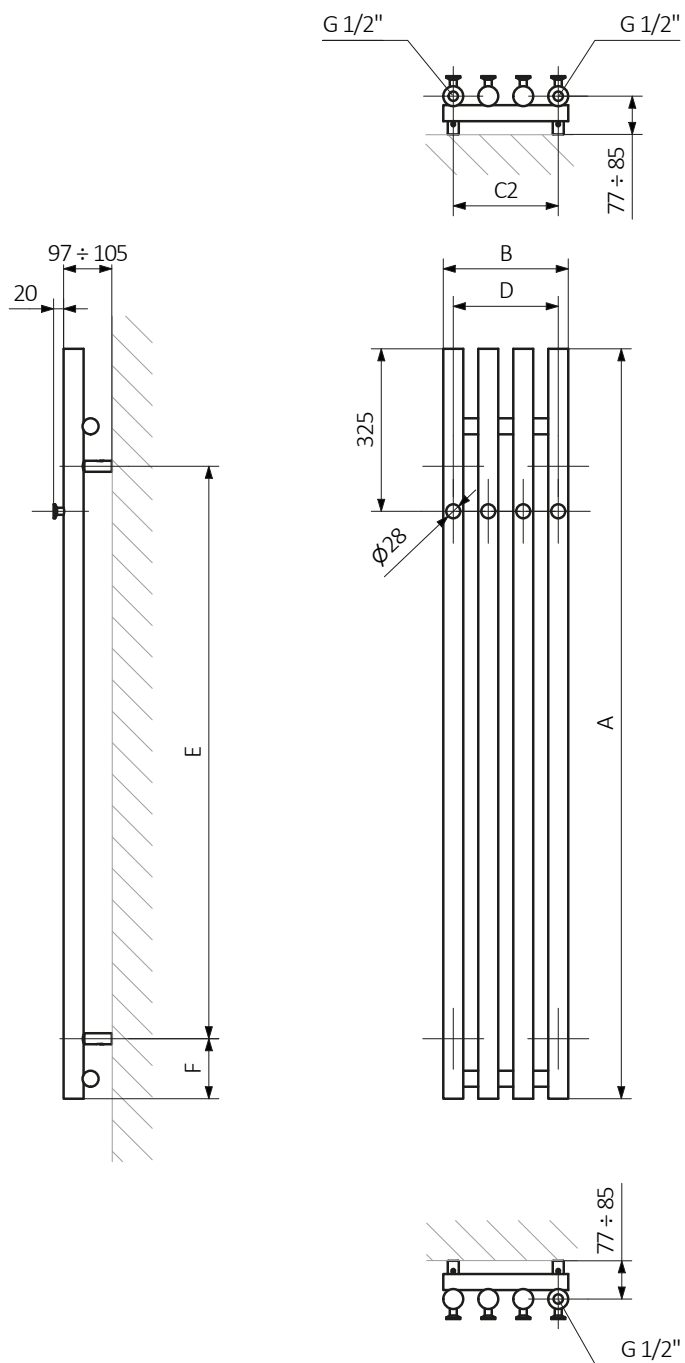


A — Height B — Width C1-C2 — Distance between pipe centres D — Horizontal distance between mounting bracket centres E — Vertical distance between mounting brackets F — Distance between a mounting bracket and the bottom of the radiator



Collector:

TECHNICAL DRAWING

SX

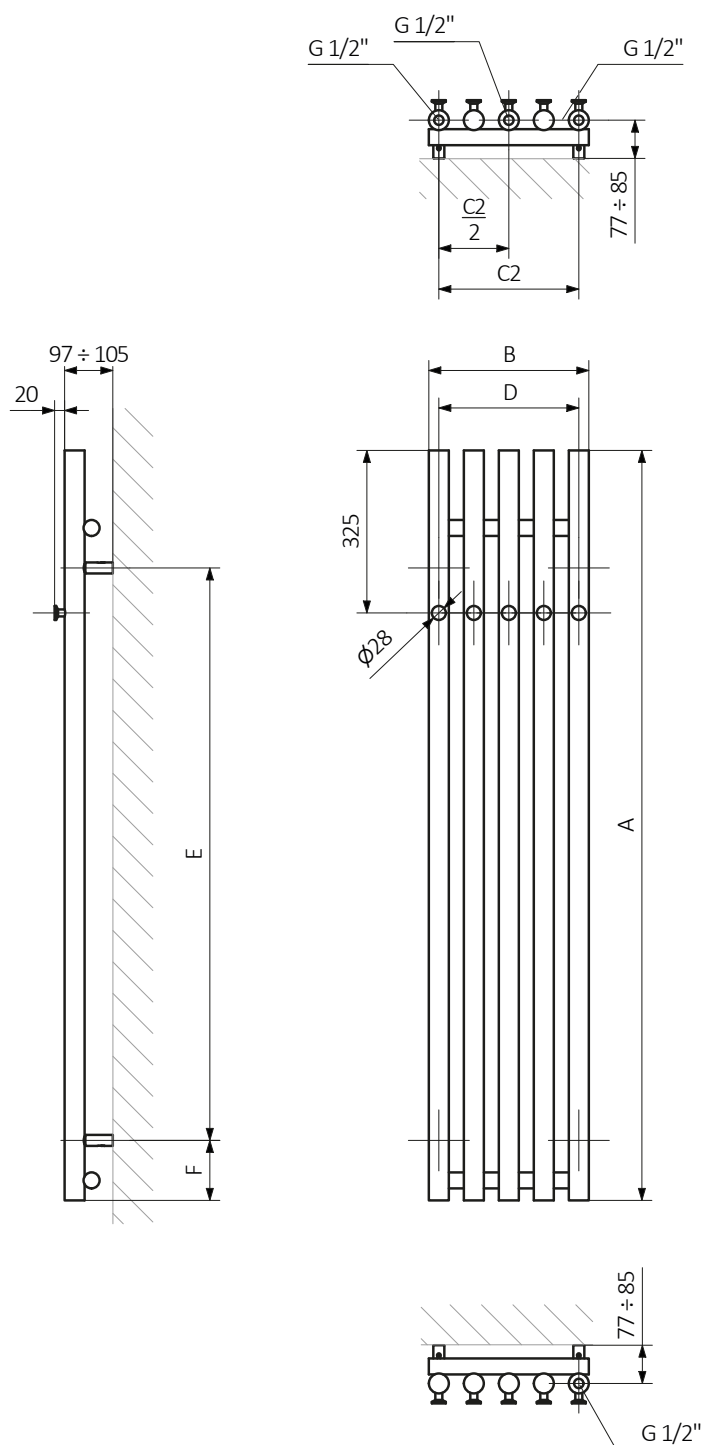


A – Height B – Width C1-C2 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator



Collector:**Pipe:**

TECHNICAL DRAWING

YX

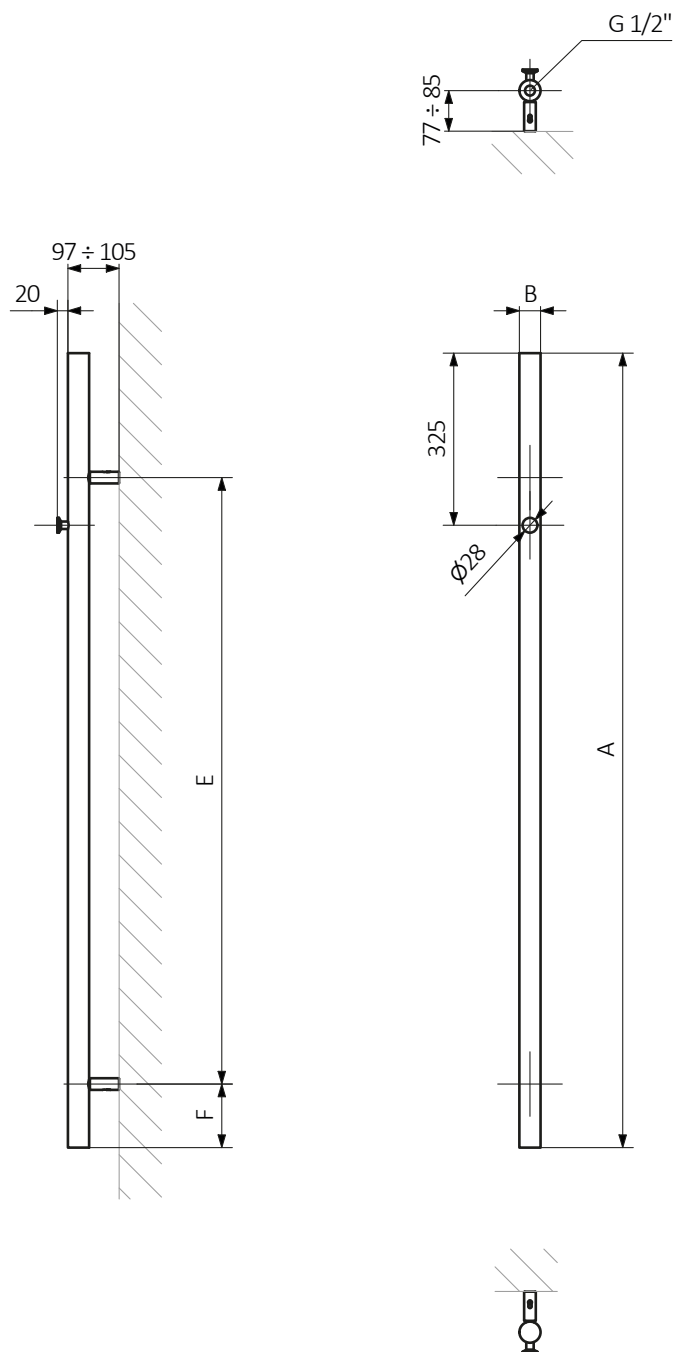


A – Height B – Width C1-C2 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator



Collector:**Pipe:**

TECHNICAL DRAWING

EX

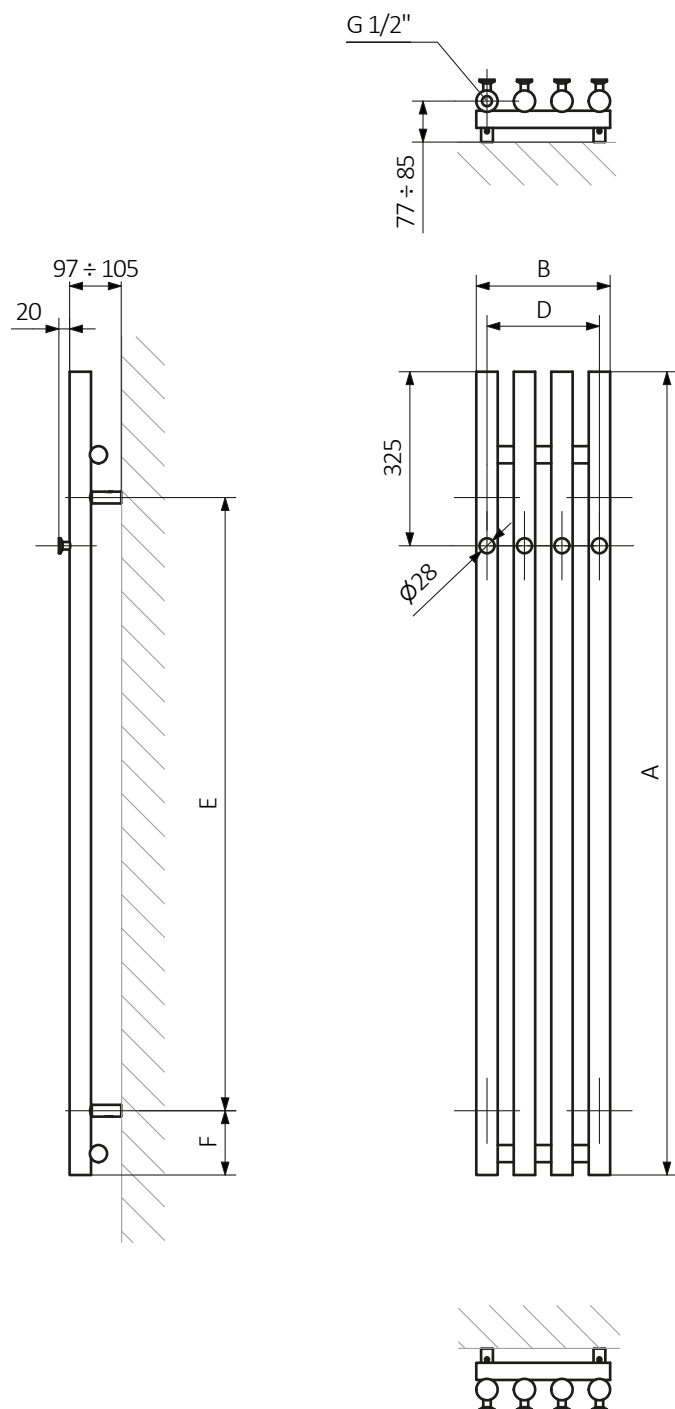


A – Height B – Width C1-C2 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator



Collector:**Pipe:**

TECHNICAL DRAWING

E1

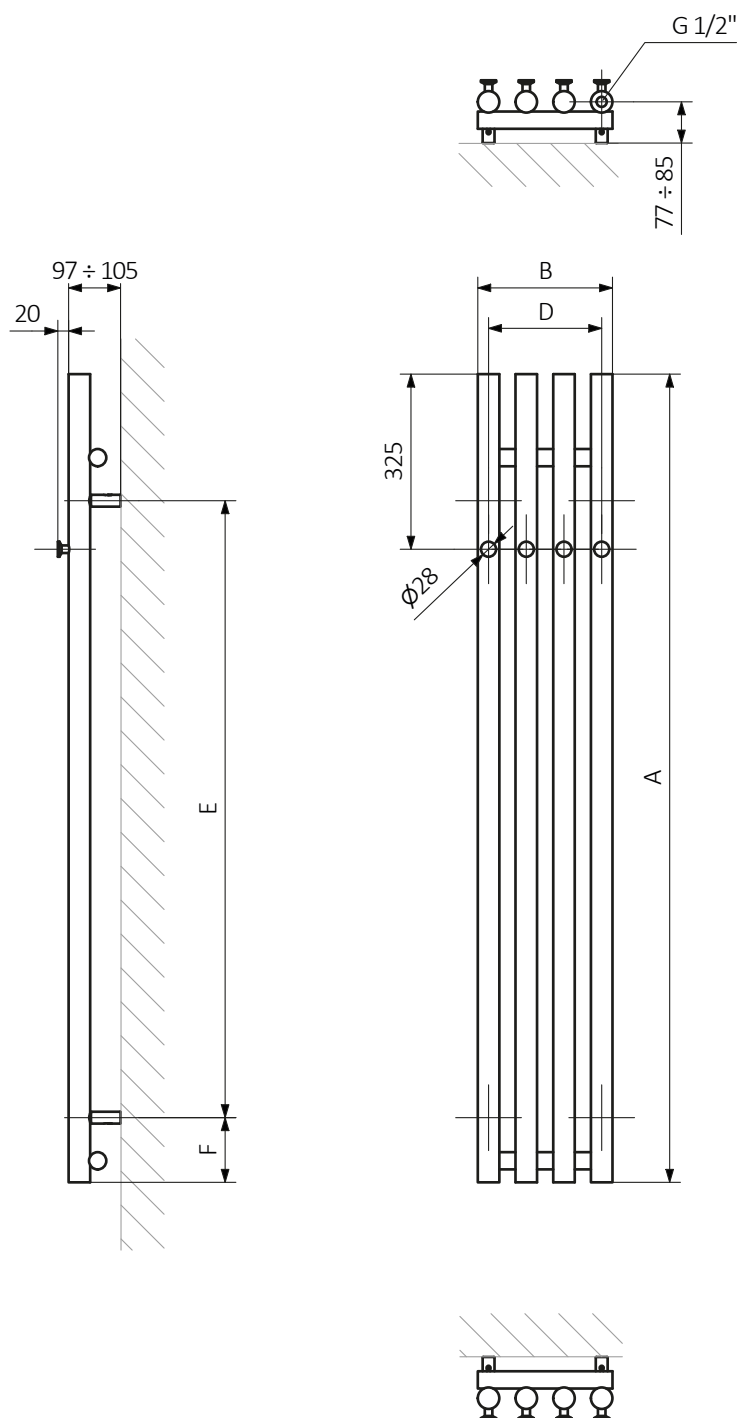


A – Height B – Width C1-C2 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator



Collector:**Pipe:**

TECHNICAL DRAWING

E8

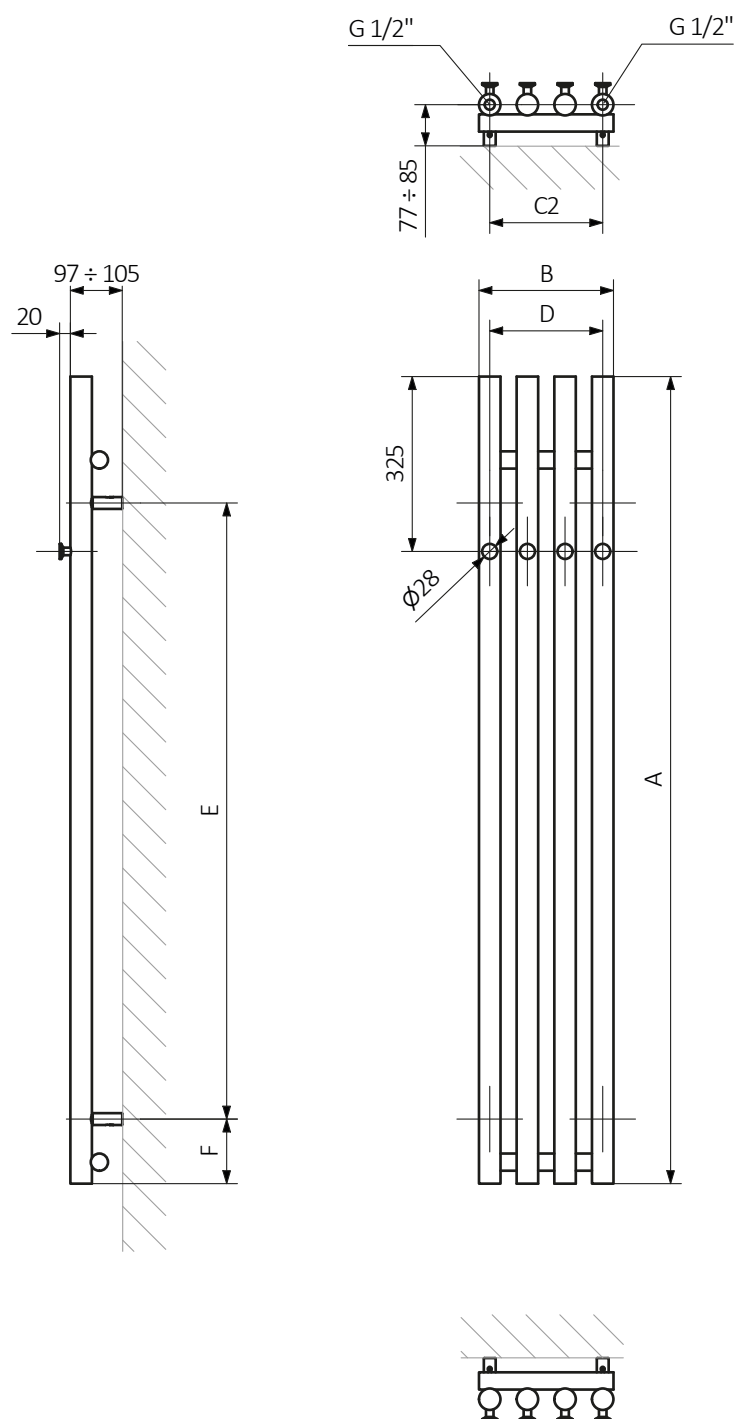


A – Height B – Width C1-C2 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator



Collector:**Pipe:**

TECHNICAL DRAWING

ES



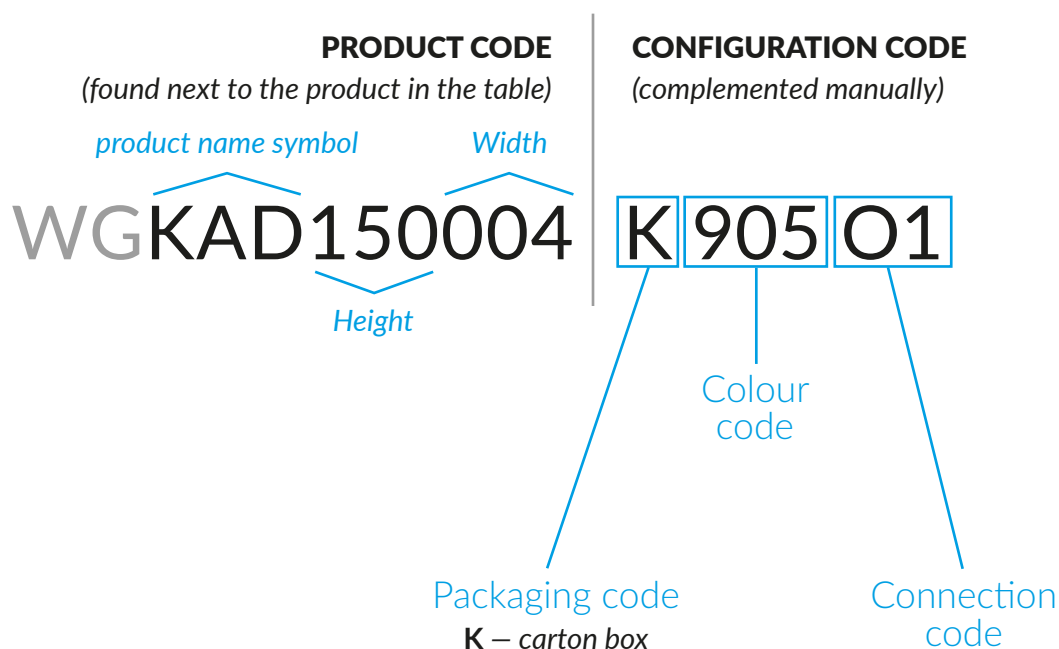
A – Height B – Width C1-C2 – Distance between pipe centres D – Horizontal distance between mounting bracket centres E – Vertical distance between mounting brackets F – Distance between a mounting bracket and the bottom of the radiator

Collector:**Pipe:**

CONFIGURATION CODE FOR A TOWEL RAIL OR RADIATOR ("WG" PRODUCT GROUP)

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:

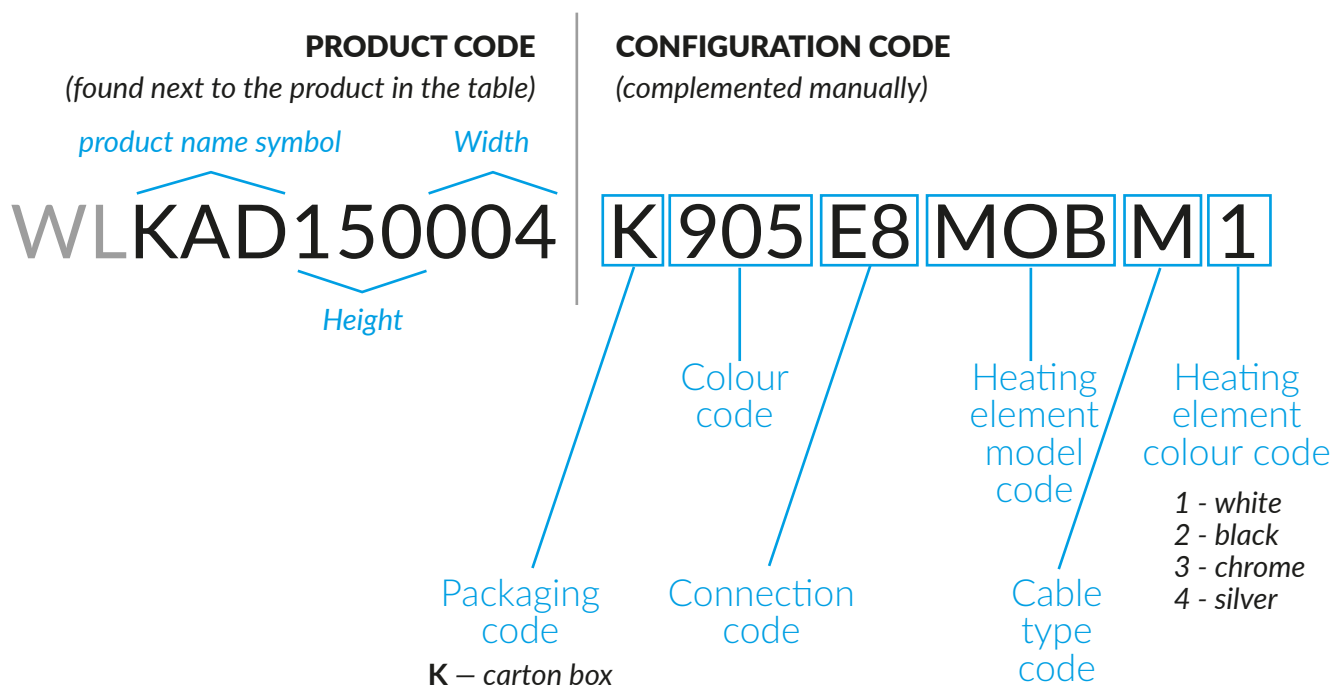


WG – water or dual fuel, central heating towel rail or radiator

A CONFIGURATION CODE FOR AN ELECTRIC TOWEL RAIL OR RADIATOR FILLED WITH OIL AND FITTED WITH A HEATING ELEMENT (PRODUCT GROUP "WL")

Product codes can be found in the product tables in both the catalogue and the price list. They provide basic information about the product and the configuration code contains information that complements the specification. When placing an order, the product codes should contain the fully completed configuration part. Part of the configuration code should be placed after the main product code as shown in the example below:

CODE DETAILS:



WL – electric towel rail or radiator filled with Oil and fitted with a factory installed heating element